

Handy & Air Cooled Dry Pump NeoDry Series

Kashiyama
Vacuum Solutions

01

FEATURE

Maintenance cycle;
Once in 3 years!
(Approx. when Air/N₂ is used)



02

FEATURE

No Tip-seal replacement,
No Performance deterioration,
No Particles!

03

FEATURE

No Oil smoke,
No chamber contamination!

04

FEATURE

Hassle free to
replace rotary/
scroll pumps!

05

Condensation-prone gas,
like water vapor
or solvent, available!

06

By virtue of inverter,
frequency does not affect
to performance!

07


Low noise,
low vibration!

Mechanism

Two multi-stage root-rotors rotate without contact,
compressing gas for exhaust.

No oil in pumping room:
Dry pumping with "Clean
exhaust"

No cooling water:
"Air cooled"

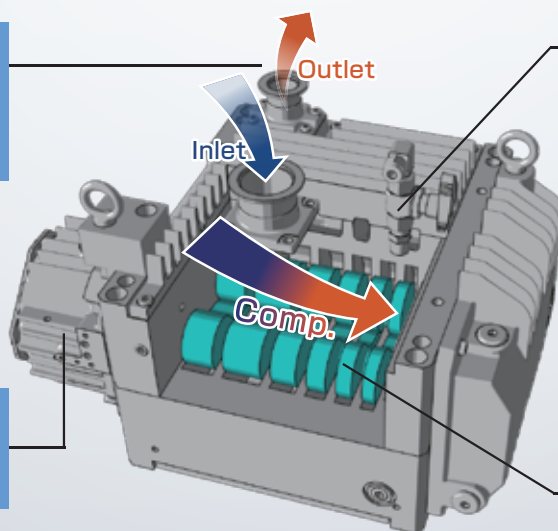

"Gas ballast port" (optional)
can take gas to reduce
partial pressure of
condensation-prone gas,
and prevent it from
condensation inside.

Roots rotors rotate
without contact arising no
particle.
"No performance
deterioration and long life"

Internal Structure of NeoDry Series except NeoDry7E

Major Products

Spec./Products	NeoDry7E	NeoDry15E	NeoDry30E	NeoDry36E	NeoDry60E	NeoDry300E
Max. pumping speed[L/min]	110	250	500	600	1,000	5,000
Ultimate pressure [Pa] (Without gas ballast)	5.0	1.0				0.5
Supply voltage(50/60Hz)*1	Single Phase, AC100 ~ 120V Single Phase, AC200 ~ 240V	Single Phase, AC100 ~ 120V Single Phase, AC200 ~ 240V 3Phase, AC200 ~ 240V			Single Phase, AC200 ~ 240V 3Phase, AC200 ~ 240V	
Gas ballast mechanism	Standard accessory	Optional (N2 available)				Standard accessory
Max allowable moisture[g/h] (With gas ballast)	120	250		350	600	
Noise [dB(A)] (Inlet closed)	≤56			≤58	≤60	≤72
Vibration [μmp-p] (Inlet closed)	≤8					
Mass[kg]	19	23	25	54	56	125
Inlet size	NW25		NW40			NW50
Outlet size	NW25					
Dimensions[mm]W*H*L*2	196*219*360	210*250*385	210*250*410	298*275*475	315*275*530	304*575*574

*1) Contact us for other voltage options. *2) Package size.

* Contact us about international standard compliance. Spec. & name of products are subject to change without prior notice.

Market


- ▶ Vacuum Drying
- ▶ Vacuum Filling
- ▶ Accelerator
- ▶ Backing pump for Turbo
- ▶ Electrode Drying
- ▶ Suction Conveyance
- ▶ Mass Spectrograph
- ▶ Vapor Pumping
- ▶ Vacuum Degassing
- ▶ Vapor Deposition
- ▶ Centrifuge
- ▶ Solvent Pumping
- ▶ Vacuum Molding
- ▶ Gas Displacement
- ▶ Freeze Dryer
- ▶ He Pumping
- ▶ Vacuum Packing
- ▶ Electron Microscope
- ▶ Evaporator
- ▶ Plasma Cleaning etc.

Our Customers

- ▶ Hokkaido Univ.
- ▶ Shinshu Univ.
- ▶ Hiroshima Univ.
- ▶ Japan Atomic Energy Agency
- ▶ National Institute of Advanced Industrial Science and Technology
- ▶ Institute for Molecular Science
- ▶ National Institute for Materials Science
- ▶ Nara Institute of Science and Technology
- ▶ High Energy Accelerator Research Organization etc.
- ▶ Tohoku Univ.
- ▶ Nagoya Univ.
- ▶ Kyushu Univ.
- ▶ Gunma Univ.
- ▶ Kyoto Univ.
- ▶ J-PARC
- ▶ National Institute of Radiological Sciences
- ▶ Tsukuba Univ.
- ▶ Osaka Univ.
- ▶ SACLA
- ▶ Tokyo Univ.
- ▶ Okayama Univ.
- ▶ SPring-8



Pumps for solvent/H2 evacuation also lined-up.
Contact us about combination with Turbo or Mechanical booster.

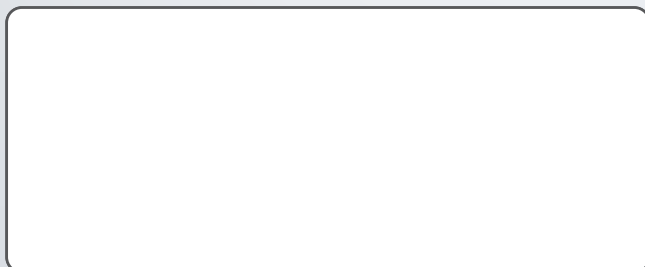

Contact us

KASHIYAMA INDUSTRIES, LTD.

URL	www.kashiyama.com
Japan [Head Office]	TEL +81-267-67-9009 FAX +81-267-67-9015 Email sales@kashiyama.co.jp
USA	TEL +1-510-979-0070 Email sales@kashiyama.com
Korea	TEL +82-31-678-1500
China	TEL +86-21-3895-4599
Taiwan	TEL +886-4-2462-9599